


## STANDARD ECO ALUMINIUM FLAGPOLE

In this model, the halyard runs outside the flagpole and is attached to a cleat mounted at approx. 1.5m above ground level. The price includes: flagpole, grey flat ball finial, rotary head, halyard, cleat, mounting anchor or fixing sleeve.

Depending on their height, the aluminium flagpoles are made up of two, three or four aluminium tubes that are pushed together using sleeves and aluminium rings. The flagpoles are installed in a concrete base using a mounting hinge or fixing sleeve. The hinge makes the installation easier and makes it possible to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.

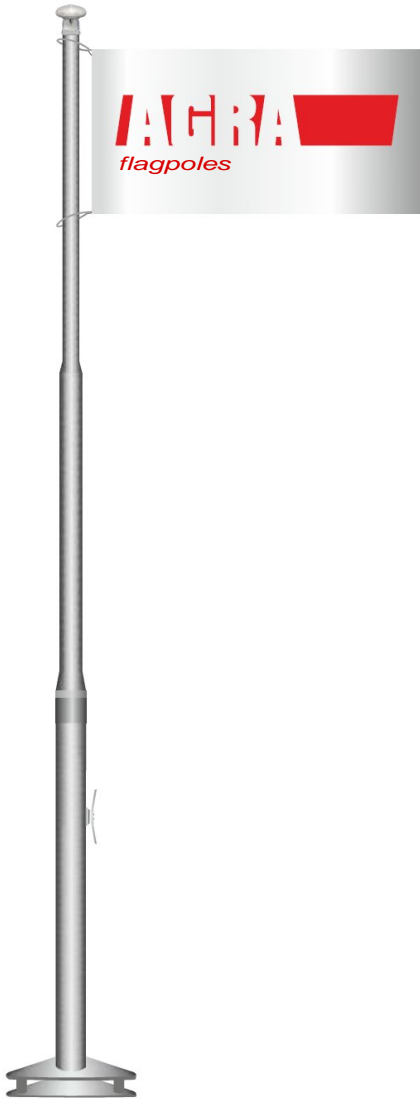

### Available accessories

#### FINIALS



LARGE GREY BALL FINIAL\*

SMALL GREY BALL FINIAL

SILVER DROP FINIAL\*\*

HEAD

\*also available in silver and gold colours

\*\*also available in white and gold colours


#### FITTING AND FLYING THE FLAG



CLEAT

HALYARD

#### BASE

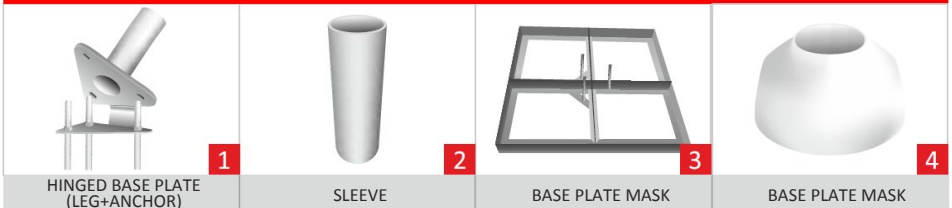

HINGED BASE PLATE (LEG+ANCHOR)

SLEEVE

BASE PLATE MASK

BASE PLATE MASK

Height (m)	4	5	6	7	8	9	10	12
Number of sections (pcs)	2	2	2	2	3	3	4	4
Section diameter (mm)	66/50	66/50	66/50	66/50	80/66/50	80/66/50	98,5/80/66/50	98,5/80/66/50
Wall thickness (mm)	3.5/3	2.5/2	2.5/2	2.5/2	3/2.5/2	3/2.5/2	4/3/2.5/2	4/3/2.5/2
Net weight without accessories (kg)	7	7.8	8.6	12.2	13.6	14.8	20.8	22.9
Recommended maximum flag dimensions (m)	100×300	100×400	120×400	120×400	120×400	150×500	150×500	150/600