


ALUMINIUM FLAGPOLE WITH WINCH

In this model, the halyard runs inside the flagpole. The flag is raised and lowered using a mechanism incorporated into the flagpole.

The price includes: flagpole, grey flat ball finial, rotary head, halyard, swivel, winch, weight, clamps (x3), mounting anchor.

Depending on their height, the aluminium flagpoles are made up of two, three or four aluminium tubes that are pushed together using sleeves and aluminium rings. The flagpoles are installed in a concrete base using a mounting hinge or fixing sleeve. The hinge makes the installation easier and makes it possible to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.

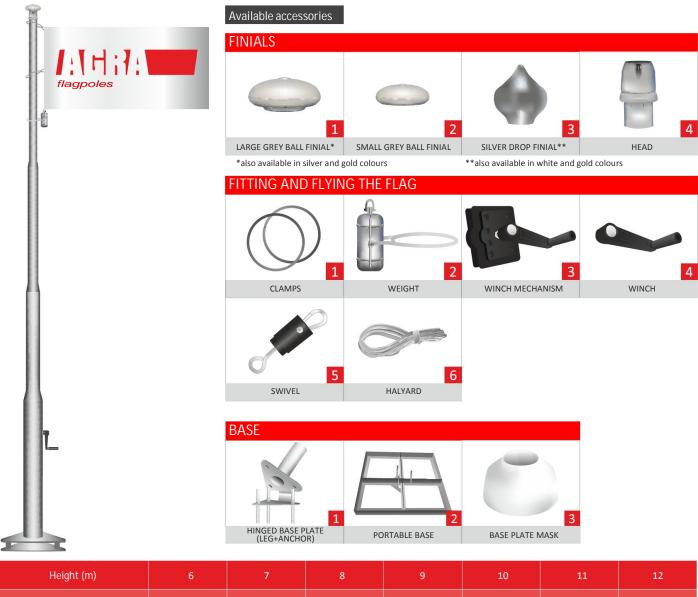

Number of sections (pcs) 120/98.5/ 120/98.5/ 120/98.5/ 120/98.5/ 120/98.5/ 120/98.5/ 120/98.5/ Section diameter (mm) 82.5/67.5 82.5/67.5 82.5/67.5 82.5/67.5 82.5/67.5 82.5/67.5 82.5/67.5 Wall thickness (mm) 5/4/3.5/3 5/4/3.5/3 5/4/3.5/3 5/4/3.5/3 5/4/3.5/3 5/4/3.5/3 Net weight without accessories (kg) 25.8 26.4 27.8 29.8 30.6 31.5 34.6 150×400 150×400 150×500 150×600 150×600 150×500