

ECO ALUMINIUM FLAGPOLE WITH LOCKABLE HALYARD AND WINDTRACKER


In this model, the halyard runs inside the flagpole. In addition, the flagpole is equipped with a horizontal rotary arm. It prevents the flag from being wrapped around the flagpole and provides an optimal way to highlight the flag slogan.

The price includes: flagpole, grey flat ball finial, rotary head, halyard, swivel, lock, jib (windtracker), weight, clamps (x5), mounting anchor or fixing sleeve.

Depending on their height, the aluminium flagpoles are made up of two, three or four aluminium tubes that are pushed together using sleeves and aluminium rings. The flagpoles are installed in a concrete base using a mounting hinge or fixing sleeve. The hinge makes the installation easier and makes it possible to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.



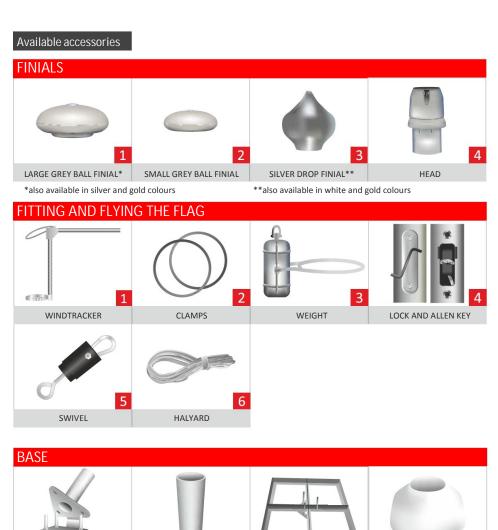

Height (m)	4	5	6	7	8	9	10	12
Number of sections (pcs)	2	2	2	2	3	3	4	4
Section diameter (mm)	66/50	66/50	66/50	66/50	80/66/50	80/66/50	98.5/80/66/50	98.5/80/66/50
Wall thickness (mm)	3.5/3	2.5/2	2.5/2	2.5/2	3/2.5/2	3/2.5/2	4/3/2.5/2	4/3/2.5/2
Net weight without accessories (kg)	7	7.8	8.6	12.2	13.6	14.8	20.8	22.9
Recommended maximum flag dimensions (m)	100×300	100×400	120×400	120×400	120×400	150×500	150×500	150/600

SLEEVE

PORTABLE BASE

BASE PLATE MASK