


ALUMINIUM FLAGPOLE WITH LOCKABLE HALYARD

In this model, the halyard runs inside the flagpole. The cleat is protected with a lock, which prevents the flag from being stolen and deadens the noise of the halyard beating against the flagpole. The price includes: flagpole, grey flat ball finial, rotary head, halyard, swivel, lock, weight, clamps (x3), mounting anchor or fixing sleeve.

Depending on their height, the aluminium flagpoles are made up of two, three or four aluminium tubes that are pushed together using sleeves and aluminium rings. The flagpoles are installed in a concrete base using a mounting hinge or fixing sleeve. The hinge makes the installation easier and makes it possible to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.

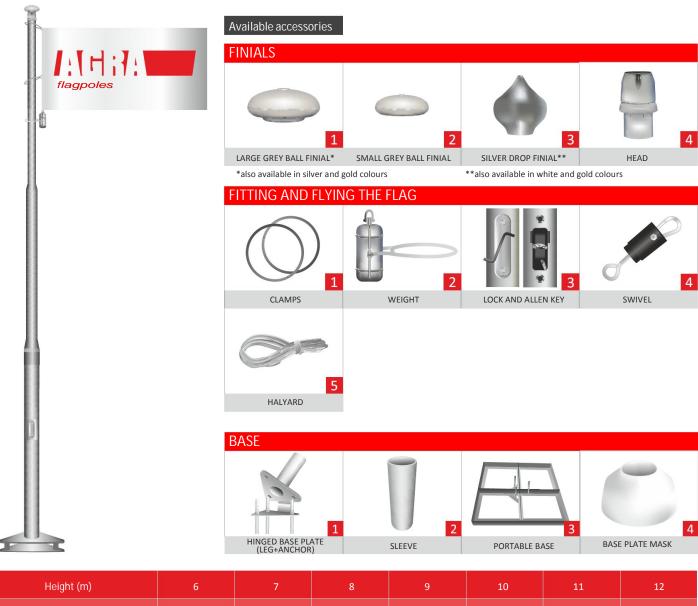

Height (m)	6	7	8	9	10	11	12
Number of sections (pcs)	2	2	2	2			3
Section diameter (mm)	82.5/67.5	82.5/67.5	82.5/67.5	82.5/67.5	98.5/82.5/67.5	98.5/82.5/67.5	98.5/82.5/67.5
Wall thickness (mm)	3.5/3	3.5/3	3.5/3	3.5/3	4/3.5/3	4/3.5/3	4/3.5/3
Net weight without accessories (kg)	13	15.6	18.2	21.5	25.7	29.5	31.4
Recommended maximum flag dimensions (m)	150×400	150×400	150×500	150×500	150×600	150×600	150×700