


GLASS FIBRE FLAGPOLE WITH WINCH AND WINDTRACKER

In this model, the halyard runs inside the flagpole. In addition, the flagpole is equipped with a horizontal rotary arm (windtracker). It prevents the flag from being wrapped around the flagpole and provides an optimal way to highlight the flag slogan.

The price includes: flagpole, white flat ball finial, rotary head, halyard, swivel, winch, jib (windtracker), weight, clamps (x5), mounting anchor.

The glass fibre flagpoles are made from a single component (tube), which is tapered towards the top. The flagpoles are installed in a concrete base using a mounting hinge. The hinge makes the installation easier and enables to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.

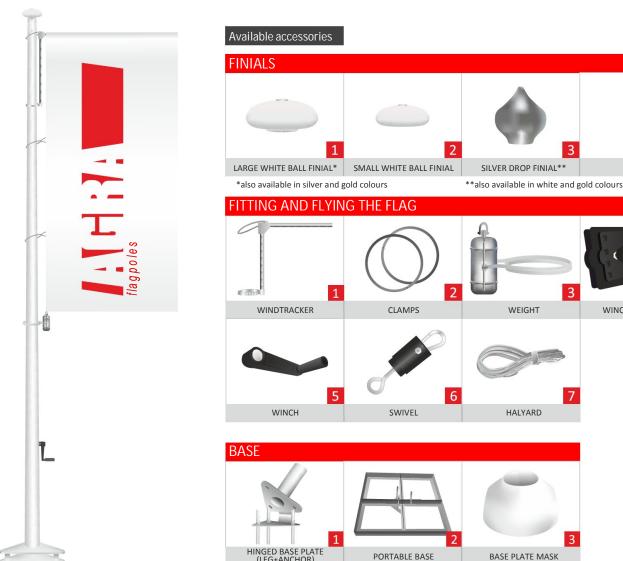

WINCH MECHANISM

		(LEG+ANCHOR) POR	PORTABLE BASE		IASK	
Height (m)	6	7	8	9	10	11	12
Diameter at base (mm)	125	125	125	125	145	145	145
Diameter at top (mm)	65	65	65	65	65	65	65
Net weight without accessories (kg)	10.8	14.2	15.2	19.9	21.8	25.6	29.4
Recommended maximum flag dimensions (m)	150×400	150×400	150×500	150×500	150×600	150×600	150×700