


GLASS FIBRE FLAGPOLE WITH WINCH

In this model, the halyard runs inside the flagpole. The flag is raised and lowered using a winch mechanism incorporated into the flagpole.

The price includes: flagpole, white flat ball finial, rotary head, halyard, swivel, winch, weight, clamps (x3), mounting anchor.

The glass fibre flagpoles are made from a single component (tube), which is tapered towards the top. The flagpoles are installed in a concrete base using a mounting hinge. The hinge makes the installation easier and enables to lay the flagpole on the ground, e.g. during maintenance. A system of screws makes it possible to adjust the vertical position of the flagpole.

Our flagpoles are available in any RAL colour.

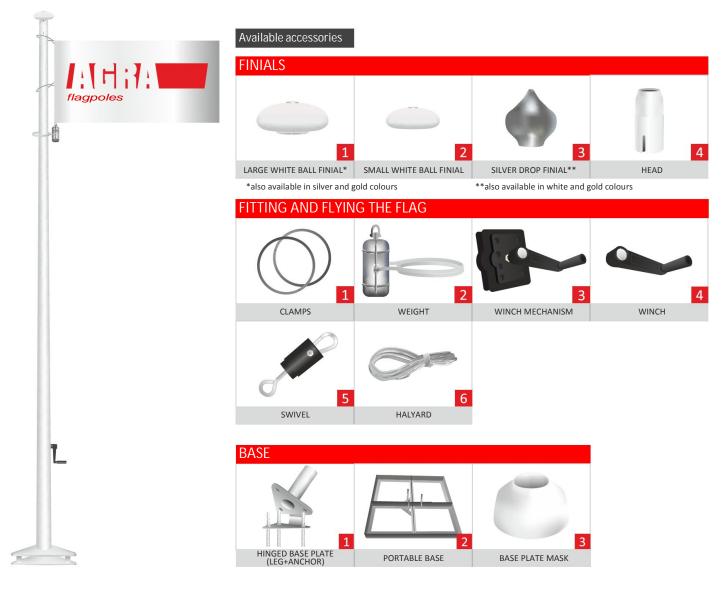

Height (m)	6	7	8	9	10	11	12
Diameter at base (mm)	125	125	125	125	145	145	145
Diameter at top (mm)	65	65	65	65	65	65	65
Net weight without accessories (kg)	10.8	14.2	15.2	19.9	21.8	25.6	29.4
Recommended maximum flag dimensions (m)	150×400	150×400	150×500	150×500	150×600	150×600	150×700